

Coaxial Adapters

FPA2K-FM

2.4mm to 2.92mm

Features:

- Low VSWR

Applications:

- Wireless
- Transmitter
- Laboratory Test
- Radar

Electrical

Frequency	DC~40GHz
VSWR	1.25 max.
Impedance	50Ω


Mechanical

RF Connectors	2.4mm
	2.92mm
Mating Life Cycle	500 cycles
Outer Conductor	Passivated stainless steel
Dielectric	PEI or PTFE
	Gold plated beryllium
Inner Conductor	copper or gold plated
	brass

Environmental

Temperature	-60~+165°C
-------------	------------

Outline Drawings

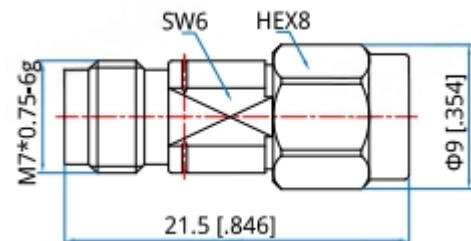

Note(s)

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]