

## Coaxial Adapters

### FPA22-MF

2.4mm to 2.4mm

**Features:**

- Low VSWR

**Applications:**

- Wireless
- Transmitter
- Laboratory Test
- Radar

#### Electrical

<b>Frequency</b>	DC~50GHz
<b>VSWR</b>	1.25 max.
<b>Impedance</b>	50Ω

#### Mechanical


<b>RF Connectors</b>	2.4mm
<b>Mating Life Cycle</b>	500 cycles
<b>Outer Conductor</b>	Passivated stainless steel
<b>Dielectric</b>	PEI
<b>Inner Conductor</b>	Gold plated beryllium copper or gold plated brass

[1] Exclude connectors.

#### Environmental

<b>Temperature</b>	-60~+165°C
--------------------	------------

#### Outline Drawings

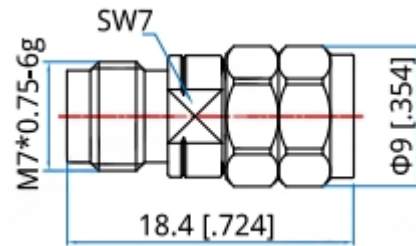

**Note(s)**

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]