

3-Way Power Divider/Combiner

FPPD3-5-1000-50-S

3-Way, 0.005~1GHz

Features:

- Small Size
- Low Insertion Loss

Applications:

- Amplifiers
- Mixers
- Antennas
- Laboratory Test

Electrical


Frequency:	0.005~1GHz
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Isolation:	12dB min.
Amplitude Balance:	0.3dB
Phase Balance:	5°
Power @SUM Port:	50W max. as divider. 50W max. as combiner.

Mechanical

Size *1:	60*80*22mm 2.362*3.15*0.866in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Construction

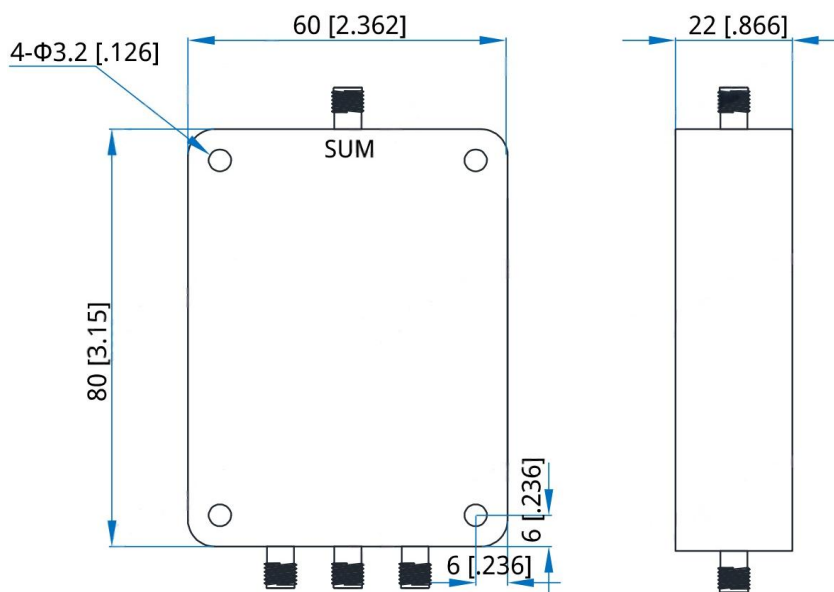

Note(s)

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]